


FLAP/S



- 
 Macchina semi-automatica per fissare 2 alette laterali su cartelle con elastico tramite 2 o 3 occhielli (o rivetti) – Patelle alimentate da appositi magazzini – Ciclo applicazione patelle completamente automatico
- 
 Half-automatic machine to fasten 2 side flaps on elastic folders by using 2 or 3 eyelets (or rivets) - Side flaps fed by proper feeders – Flap application cycle fully automatic
- 
 Machine semi-automatique pour fixer 2 rabats latéraux sur chemises à élastique par 2 ou 3 œillets (ou rivets) – Rabats alimentés par des chargeurs spécifiques – Cycle application rabats complètement automatique
- 
 通过两或三个小孔（或铆钉）把两侧活页固定在松紧带文件夹上的半自动机器—侧面活页由专门的储料装置进料—活页安装为全自动化循环

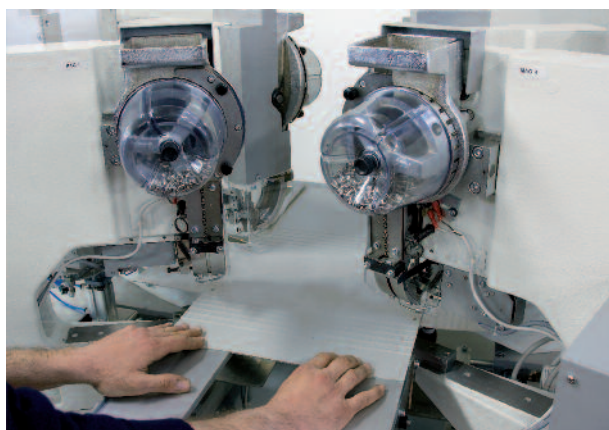

Materials:	Coated board, Grey board, Rivets or Eyelets standard range
Board thickness:	0,9 mm up to 1,5 mm
Capacity:	max. 400 applications/hour
Electrical power req.:	100 Kw
Compressed air:	250 NI/min.
Overall dimensions:	L=1600 mm W=1000 mm H=1500 mm