


Ring-binder assembling lines

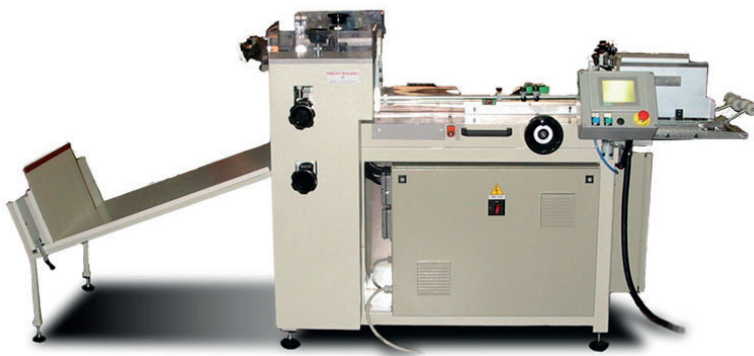

Automatic machine for multiple creases,  
supplied with automatic board feeding unit.

## Technical features

### Material:

- coated board
- fiber board or similar

**Cardboard thickness:** 1 mm up to 3,5 mm

**Capacity:** up to 30 cycles/min. (with 2 creases)

### Optionals:


- soft board blade (min. 200 gr/sqm)
- heated blade for PP (Thickness min. 0,5 mm)

**Electrical power req.:** 4 Kw

**Compressed air:** 50 NL/min. (pressure 7 bar)

### Overall dimensions:

L=3200mm; W=1210mm; H=1350mm;

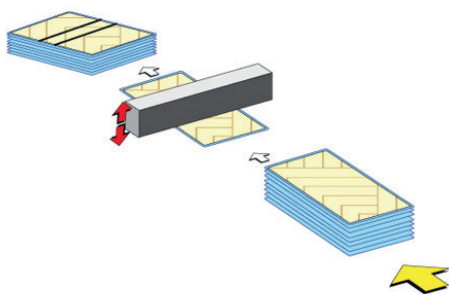

Dynamic process

